

Rx

The
Patent
Office

99/600359

PCT/GB 99 / 00044

18 JANUARY 1999



5

INVESTOR IN PEOPLE
The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP9 1RH

REC'D 10 MAR 1999

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.


Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

Signed

Dated 19 February 1999

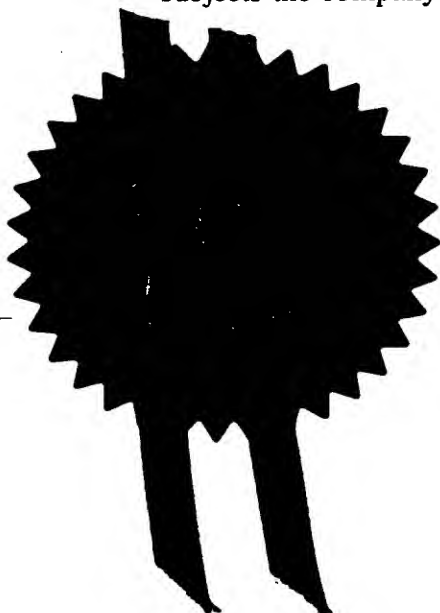



THIS PAGE BLANK (USPTO)

Patents Form 1/77

THE PATENT OFFICE

The
Patent
Office

1977

16 JAN 1998

RECEIVED BY FAX

16 JAN 98 1330918-1 000354
P01/7700 25.00 - 9800814.7**Request for grant of a patent**

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

PBA/D088081PGB

2. Patent application number

(The Patent Office will fill in this part)

9800814.7

3. Full name, address and postcode of the or of each applicant (underline all surnames)

FOOD GUARDIAN LIMITED
ASHFIELDS
LEIGH SINTON
MALVERN
WORCESTERSHIRE
WR13 5DH
UNITED KINGDOM

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

630097400/

4. Title of the invention

BARRIER MATERIALS AND
PRODUCTS PRODUCED THEREWITH

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

MARKS & CLERK
SUSSEX HOUSE
83-85 MOSLEY STREET
MANCHESTER, M2 3LG
UNITED KINGDOM

Patents ADP number (if you know it)

18004

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

YES

16 JAN '98 09:53

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description

7

Claim(s)

2

Abstract

Drawing(s)

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77)

Request for preliminary examination and search (Patents Form 9/77)

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11.

I/we request the grant of a patent on the basis of this application.

Signature

Date

MARKS & CLERK 16/01/1998

12. Name and daytime telephone number of person to contact in the United Kingdom

MR. P.B. ATKINSON - 0161 236 2275

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- a) If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- c) If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

BARRIER MATERIALS AND PRODUCTS PRODUCED THEREWITH

The present invention relates to heat disruptable barrier materials (particularly but not exclusively thin plastics films), to the disruption of such materials, and to products incorporating these materials.

There are numerous examples of products incorporating barrier materials which must be disrupted (e.g. punctured) to allow communication between both sides of the barrier. Examples of such products include containers which contain food to be microwaved and which are covered with a film or the like which must be punctured prior to the food being microwaved to ensure that steam is vented from the container. Whilst it may be a relatively simple task manually to puncture the film for a single product item, it obviously becomes time consuming to repeat the operation for a plurality of items, e.g. for catering on a commercial scale.

A further problem of puncturing barrier layers occurs when the barrier is beneath a further layer which itself must not be punctured. A particular example of this problem is encountered in the marking element disclosed in WO-A-9208113 which is used for indicating whether a product has been maintained under a particular temperature or temperature-time condition. More particularly the marking element as manufactured comprises an ink separated from an absorbent wick by a heat disruptable film, all of these components being provided beneath an upper film layer of higher melting/softening temperature than the heat disruptable film.

By way of further explanation, the marking element may be one which is to be used for indicating whether frozen food has been stored at a higher temperature (e.g. room temperature) than is required. As such, the ink is one which is (i) not capable of flowing at the correct storage temperature of the food, but (ii) capable of flowing at or above the temperature at which the food should not be stored. When the marking element is manufactured it is necessary to ensure that the ink (which will flow at the

manufacturing temperature) is separated from the wick - hence the need for the barrier layer.

Subsequent to manufacture, the marking element is cooled down (either before or after application to the product to be monitored) to a temperature at which the ink will not flow. The element is then "activated" by application of a heated probe to the upper film layer. This probe is at a temperature at which it does not disrupt the outer film layer but is capable of puncturing the heat disruptable layer so as to allow the ink to reach the wick. If the temperature the product increases beyond a predetermined value then the ink is capable of flowing in the wick to provide an indication of the undesired increase in temperature.

Whilst such marking elements function in a perfectly satisfactory manner, the need to use a heated probe makes it difficult to activate the elements, particularly if they have already been applied to the product to be monitored.

It is an object of the present invention to obviate or mitigate the abovementioned disadvantages.

According to a first aspect of the present invention there is provided a barrier material comprised of a heat disruptable material associated with an element capable of being inductively heated by electromagnetic energy to effect disruption of said material.

According to a second aspect of the present invention there is provided a method of disrupting a barrier material as defined in the previous paragraph, the method comprising subjecting the barrier material to electromagnetic energy capable of inductively heating said element to effect disruption of the material.

The heat disruptable material may for example be a film, most preferably a plastics film.

The inductively heatable element may be of any material with the requisite conductivity, e.g. metal, carbon or a conductive plastics or polymeric material. Conveniently the inductively heatable element is provided by a marking of an electrically conductive (e.g. metallic) ink or patch on or otherwise associated with the heat disruptable material. Further possibilities for the element are a foil, sheet or film of a metal. A still further possibility is a marking of a graphite (carbon) loaded ink.

The inductively heatable element may be on either side of, or within, the barrier material and may be of any desired shape appropriate to the electromagnetic energy to be used, e.g. a disc or an annulus. The annulus may be of uniform width across its inner and outer edges (e.g. as provided by two concentric circles) or may have one or more "restrictions" around its width.

Preferably also the electromagnetic energy for inductively heating the element is radiofrequency energy (10^4 Hz to 3×10^{12} Hz). Preferably the frequency is from 50 kHz to 1 MHz more typically 100 kHz to 500 kHz, e.g. 160 kHz to 180 kHz. The power may be 100 W to 1000 W, typically 500 W.

The electromagnetic energy may be microwave energy such that the barrier material of the invention may be used, for example, as a covering for a container which is intended to be heated in a microwave oven. As such, the microwave energy effects inductive heating of the element resulting in the disruption of the covering. As such the need for manual puncturing is avoided.

The barrier material of the invention is particularly suitable for use in products in which a barrier to be punctured is provided beneath at least one further layer which

is required to remain intact since using electromagnetic energy it is possible selectively to disrupt the barrier layer.

The barrier material is particularly suitable for use in a marking element for indicating whether a pre-defined temperature condition has been maintained.

As such there is provided, according to a third aspect of the invention, a marking element for indicating whether a pre-defined temperature condition has been maintained comprising a first material capable of flowing above a predetermined temperature separated from a second absorbent material by a heat disruptable barrier layer, the first and second materials being such that when the barrier layer is punctured and the predetermined temperature is exceeded the first material flows in the second material to produce a detectable change wherein the heat disruptable barrier layer is in accordance with the first aspect of the invention.

In the marking element according to the third aspect of the invention, the barrier layer together with the first and second materials may be provided beneath an outer layer (e.g. an outer film layer). The barrier layer may be selectively disrupted by the use of electromagnetic energy of the appropriate frequency thus avoiding the need for the outer covering layer to be of a higher melting/softening temperature than the barrier layer and the need to use a heated probe. A related advantage is that the marking element may be activated simply by positioning the element (e.g. *in situ* on a product to be "monitored" by the element) close to an electromagnetic field of the appropriate frequency to effect disruption of the barrier layer. This is a much more convenient technique to the use of a heated probe.

The invention will be further described by way of example only with reference to the accompanying drawings, in which:

Fig. 1 is an exploded perspective view of one embodiment of marking element in accordance with the third aspect of the invention;

Fig. 2 is a cross-section of the label illustrated in Fig. 1 prior to activation thereof;

Fig. 3 is a cross-section similar to Fig. 2 but shows the label in an activated condition and also indicated that a product has been stored above a predetermined temperature; and

Fig. 4 is a plan view of the label in the condition shown in Fig. 3.

As shown in Fig. 1, a marking element 1 in accordance with the invention is removably mounted on a carrier sheet 2 and is a laminar structure comprised of layers 3-6 described in more detail below and an ink 7 (not shown in Fig. 1 but see Fig. 2).

In more detail, layer 4 is a barrier layer in accordance with the first aspect of the invention and is comprised of a heat disruptable plastics film 8 provided with an inductively heatable element in the form of a marking 9 of an inductively heatable conductive ink. Alternatively the inductively heatable element may for example be provided by a thin metal disc or a metal joint. At its undersurface, barrier layer 4 is bonded around its peripheral surface to the corresponding area of the upper surface of the layer 3 so that a reservoir space (in which the ink 7 is located) is formed between the layers 3 and 4. The undersurface of layer 3 is releasably attached to carrier 2 so that the label 1 may be removed therefrom and attached (by the adhesive) to a product to be monitored.

The indicator layer 5 is of paper which has been treated with a resin so that only a central area 10 (shown in Fig. 1 in the shape of a thermometer) remains absorbent, the remaining area of the layer 5 as depicted by the hatched lines being

non-absorbent. The undersurface of layer 5 is bonded in the hatched areas to the upper surface of the barrier layer 4 and it will be noted from Fig. 1 that the marking 9 of reflective ink (on the barrier layer 4) locates immediately beneath the "bulb" of the thermometer-shaped absorbent area 10 of indicator layer 5.

Layer 6 is a clear plastics layer which overlies, and is bonded to the indicator layer 5. The absorbent area 10 is of contrasting colour to the ink 7.

In the marking element 1 as shown in Figs. 1 and 2, the barrier layer 4 prevents contact between the ink 7 and the absorbent area 10 of indicator layer 5. The ink 7 is one which (once the barrier layer has been disrupted - see below) is only capable of flowing in the absorbent area 10 of layer 5 if the label 1 is above a predetermined temperature. The ink may, for example, comprise an alkyl (particularly a C_{14} alkyl) ester of a long-chain fatty acid. Examples of esters which may be used include ethyl myristate, butyl myristate and butyl laurate. It will of course be appreciated that the ink may comprise a mixture of esters to ensure that the ink flows above a particular temperature. A further possibility is for the ink to comprise a polymeric material which reversibly fuses above a predetermined temperature, e.g. a thermo-reversible wax. Inorganic salts (e.g. sodium or potassium chloride) can also be incorporated in the polymeric material for providing the required temperature of fusion.

For the purposes of "activation", the label 1 is subjected to a temperature at which the ink 7 will not flow. Subsequently, the label 1 (which may be attached to the product to be monitored) is placed close to an electromagnetic field or sufficient energy (flux density) to effect inductive heating of the ink 9. This causes disruption (puncturing) of the film 8 beneath the "bulb" of the absorbent area 10 of layer 5 which therefore comes into communication with the reservoir of ink 7.

Provided that the product to which the marking element 1 is attached, is maintained below a predetermined temperature, the ink is unable to flow (or at least unable to flow to any substantial extent) and does not colour the absorbent area 10. If however the product is raised above the permitted temperature then the ink will flow into, and indelibly mark, the area 10 as depicted in Figs. 3 and 4.

16 JAN '98 09:56

CLAIMS

1. A barrier material comprised of a heat disruptable material associated with an element capable of being inductively heated by electromagnetic energy to effect disruption of said material.
2. A barrier material as claimed in claim 1 wherein the heat disruptable material is a film.
3. A barrier material as claimed in claim 2 wherein the film is a plastics film.
4. A barrier material as claimed in any one of claims 1 to 3 wherein the element is provided on the heat disruptable material.
5. A barrier material as claimed in any one of claims 1 to 4 wherein the metallic element is provided by a conductive ink.
6. A barrier material as claimed in claim 5 wherein the conductive ink is a metallic ink or a graphite loaded ink.
7. A barrier material as claimed in any one of claims 1 to 4 wherein the inductively heatable element is provided by metal, carbon or an electrically conductive plastics or polymeric material.
8. A barrier material as claimed in claim 7 wherein the inductively heatable element is of metal in the form of a film, sheet or foil.
9. A barrier material as claimed in any one of claims 1 to 8 which is disruptable by radiofrequency energy.

10. A barrier material as claimed in any one of claims 1 to 8 which is disruptable by microwave energy.
11. A method of disrupting a barrier material as claimed in any one of claims 1 to 10, the method comprising subjecting the barrier material to electromagnetic energy capable of inductively heating said element to effect disruption of the material.
12. A marking element for indicating whether a pre-defined temperature condition has been maintained comprising a first material capable of flowing above a predetermined temperature separated from a second absorbent material by a heat disruptable barrier layer, the first and second materials being such that when the barrier layer is punctured and the predetermined temperature is exceeded the first material flows in the second material to produce a detectable change wherein the heat disruptable barrier layer is as claimed in any one of claims 1 to 10.
13. A marking element as claimed in claim 12 comprising a lower layer which, together with the heat disruptable barrier layer, forms a reservoir for the first material, and an absorbent layer provided on the opposite side of the barrier layer to said reservoir.
14. A marking element as claimed in claim 13 wherein the absorbent layer is overlaid by a transparent film.

THIS PAGE BLANK (USPTO)

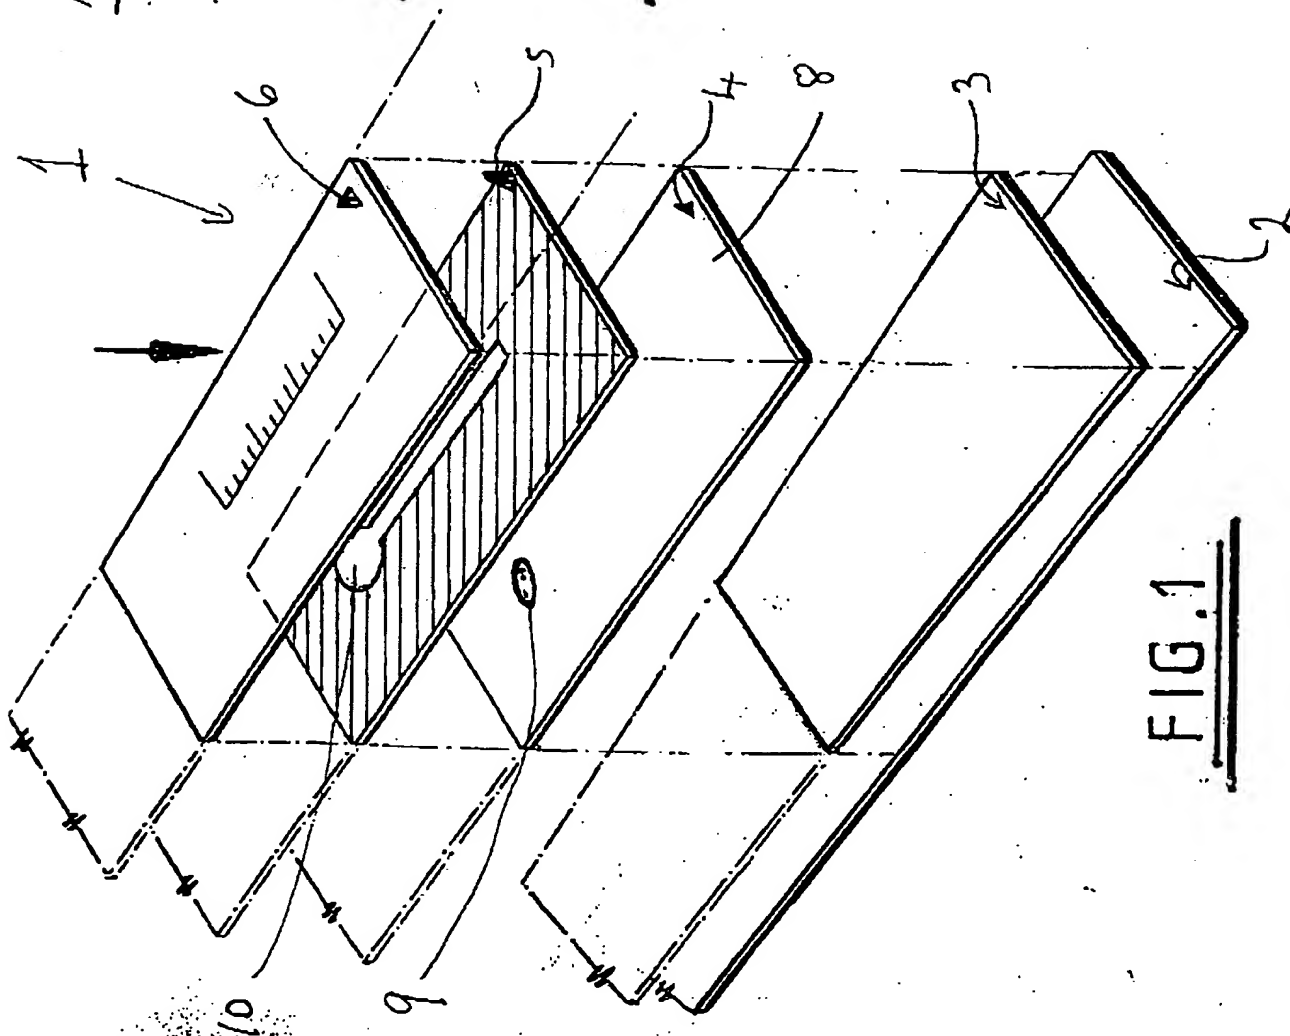


FIG. 1

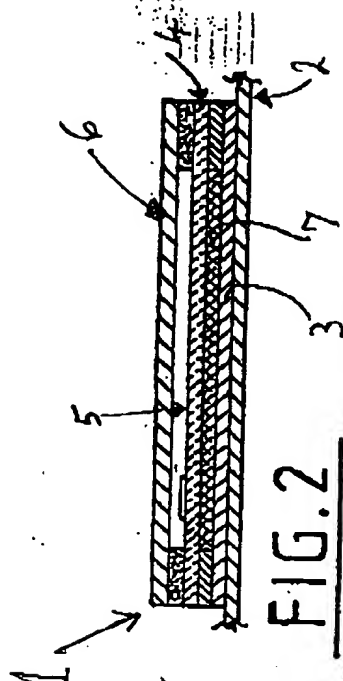


FIG. 2




FIG. 3

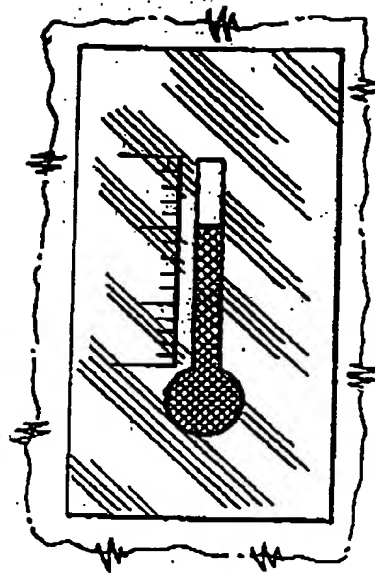


FIG. 4

PCT/EIB 99/00044

12.2.99

marks & Clerk

THIS PAGE BLANK (USPTO)